




(PRIOR ART)
FIGURE 1

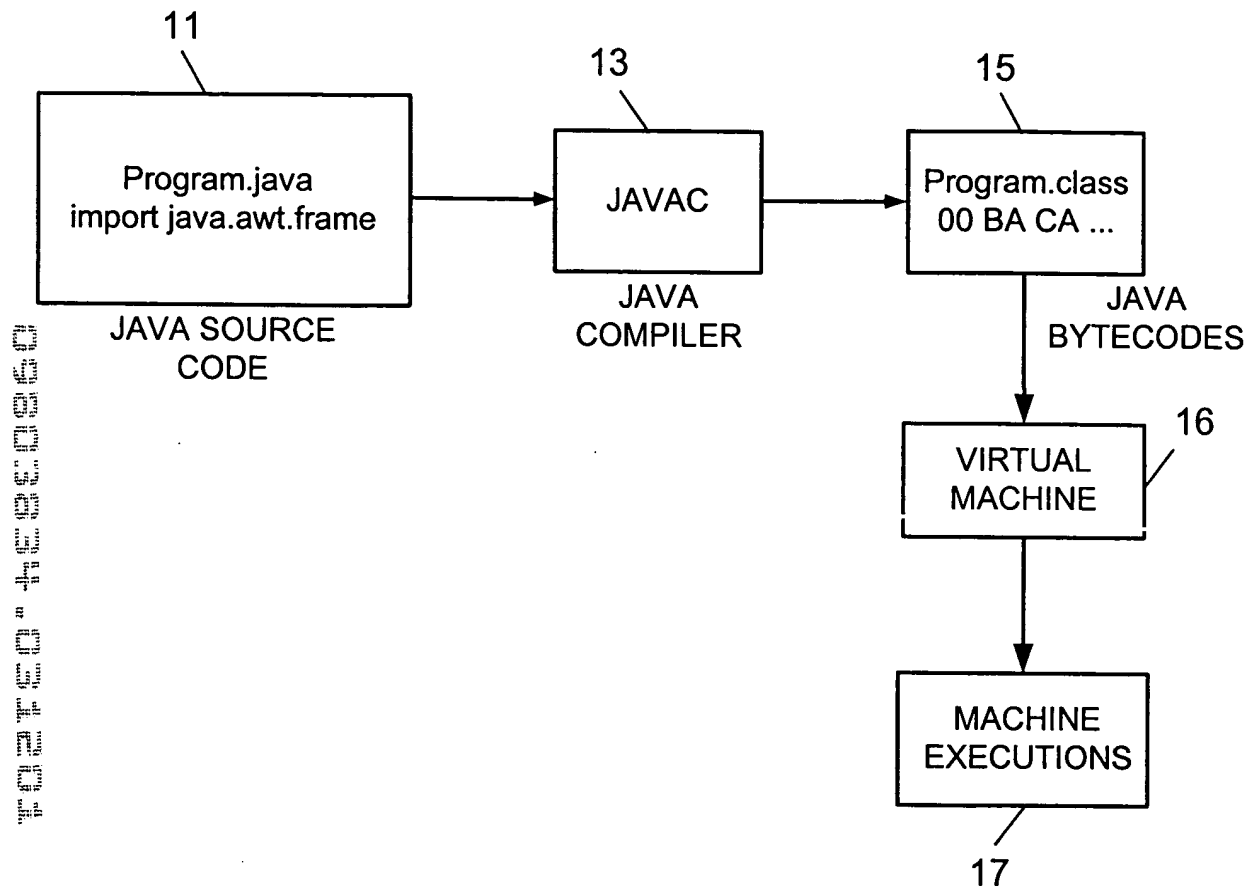


(PRIOR ART)
FIGURE 2

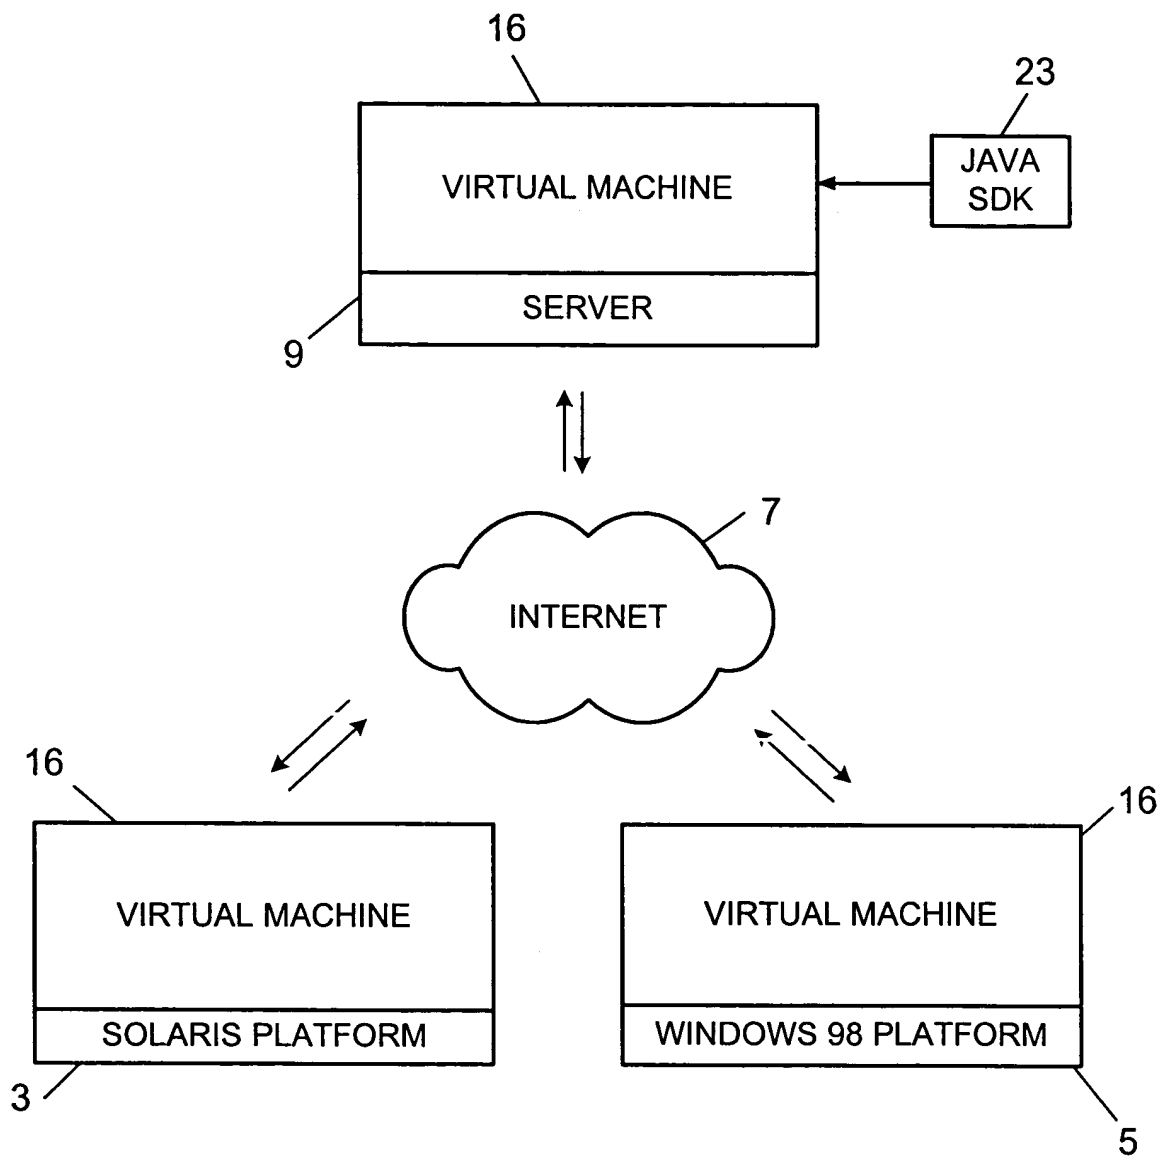

(PRIOR ART)
FIGURE 3

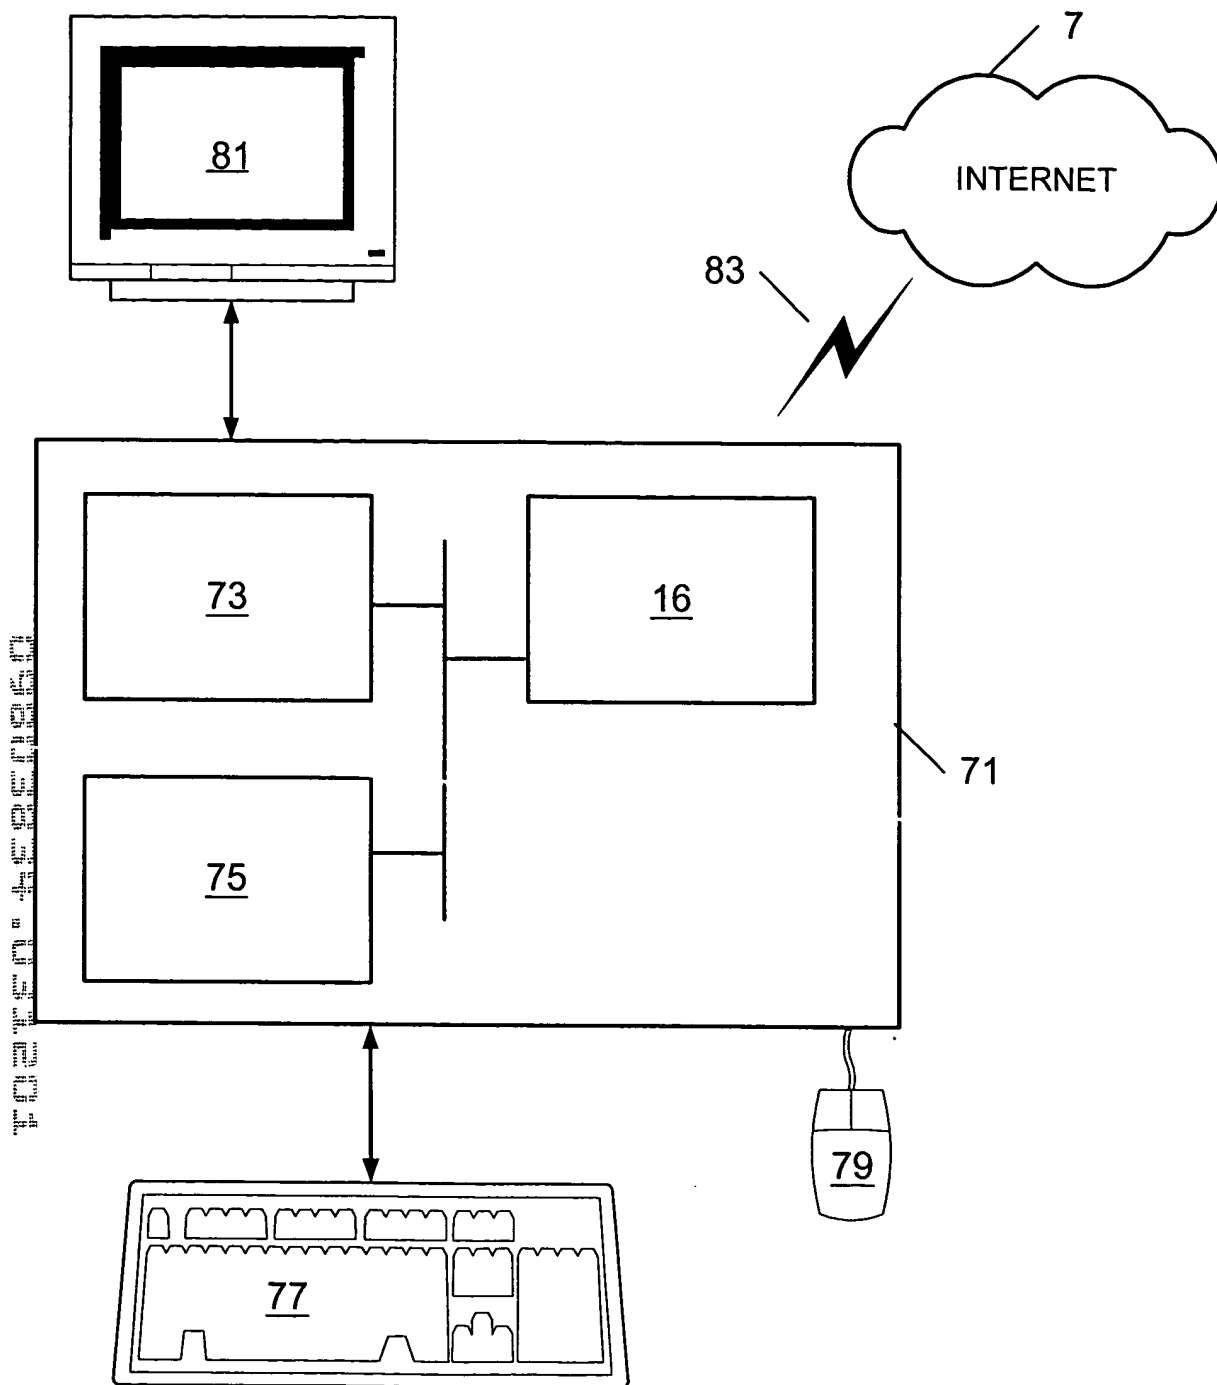


(PRIOR ART)
FIGURE 4

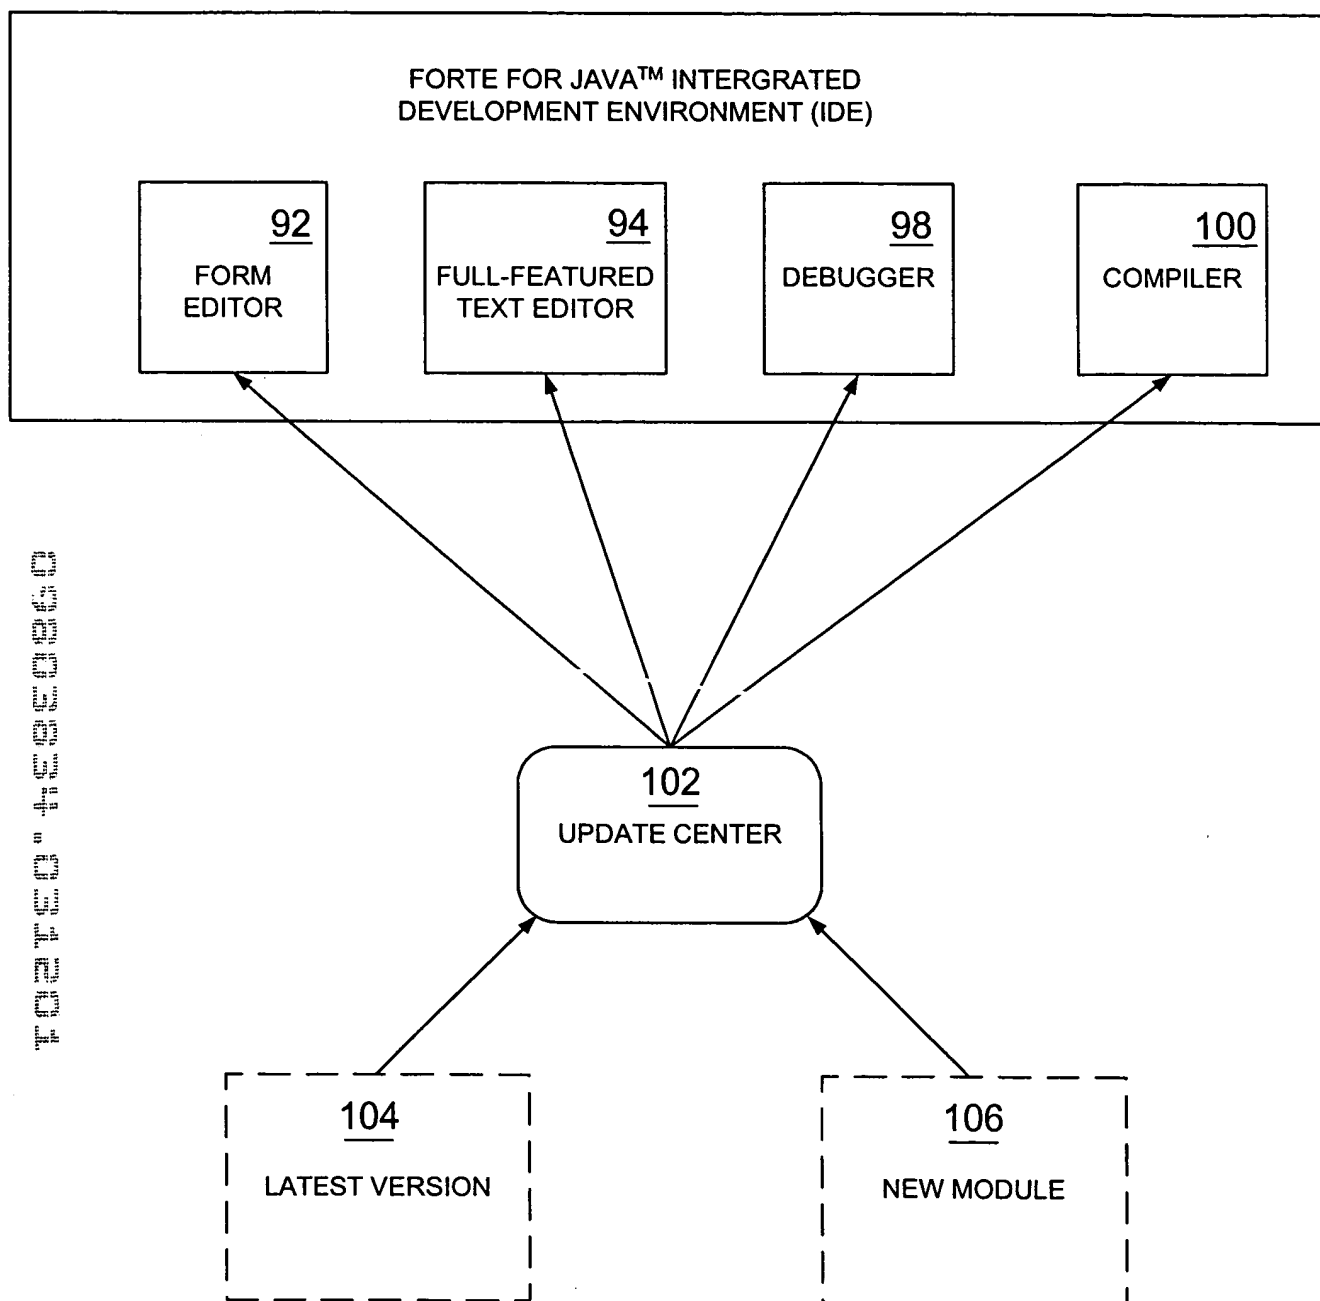


(PRIOR ART)
FIGURE 5


J2ME™ TECHNOLOGY

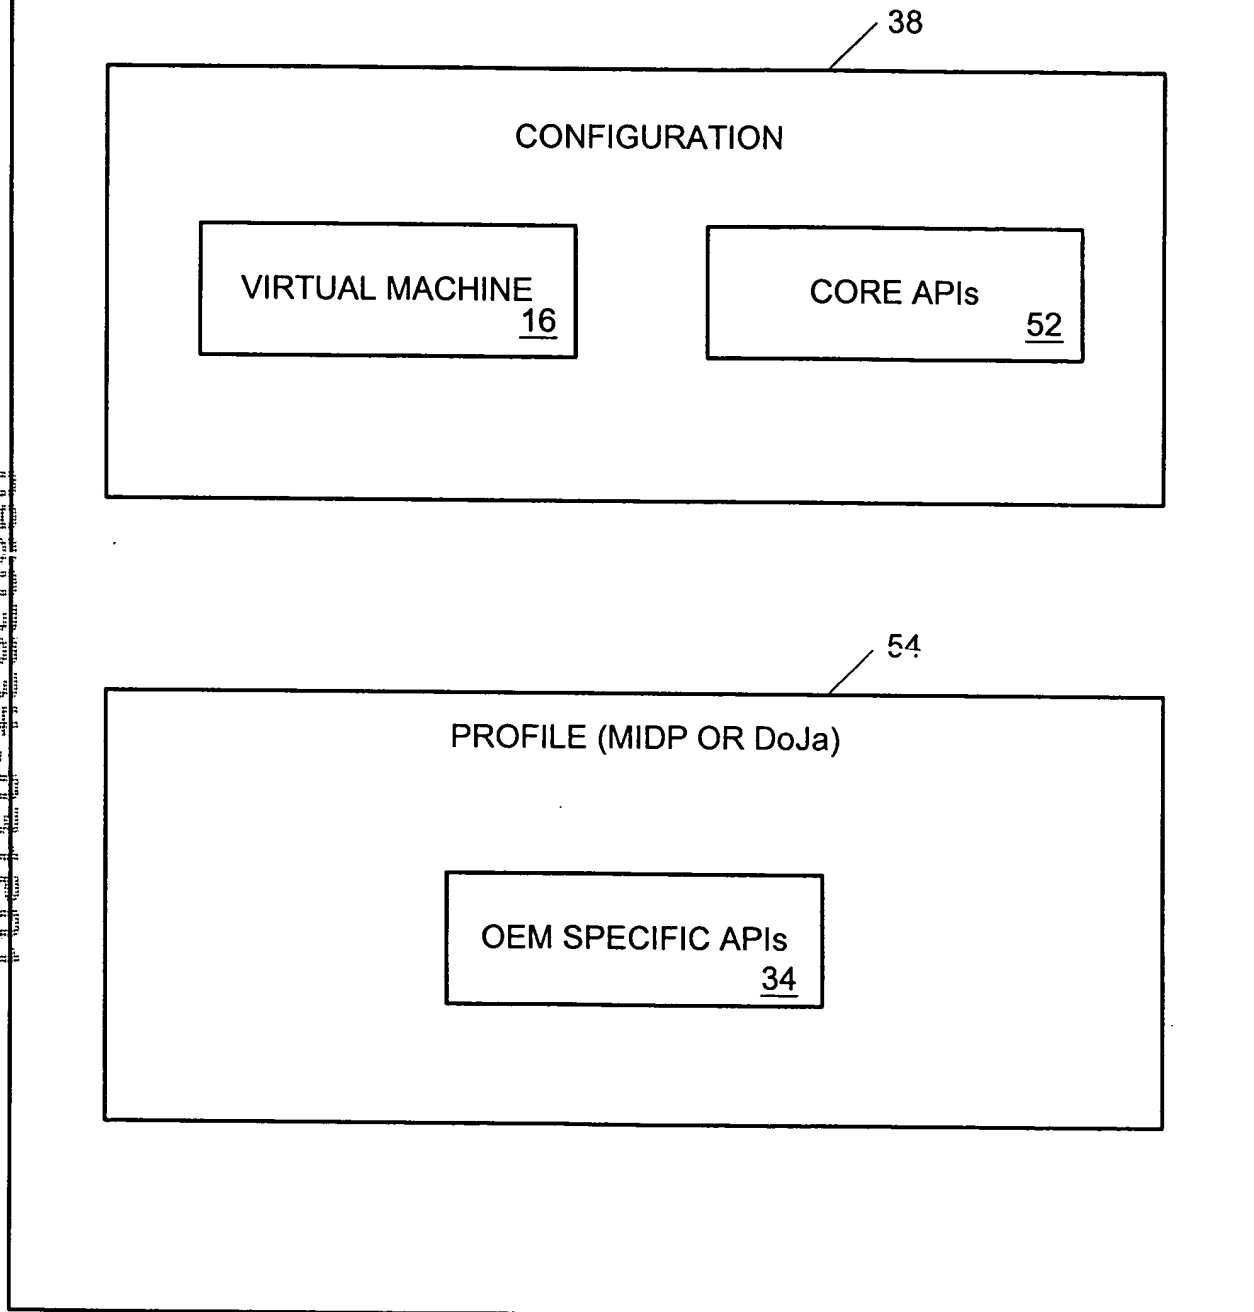

(PRIOR ART)
FIGURE 6

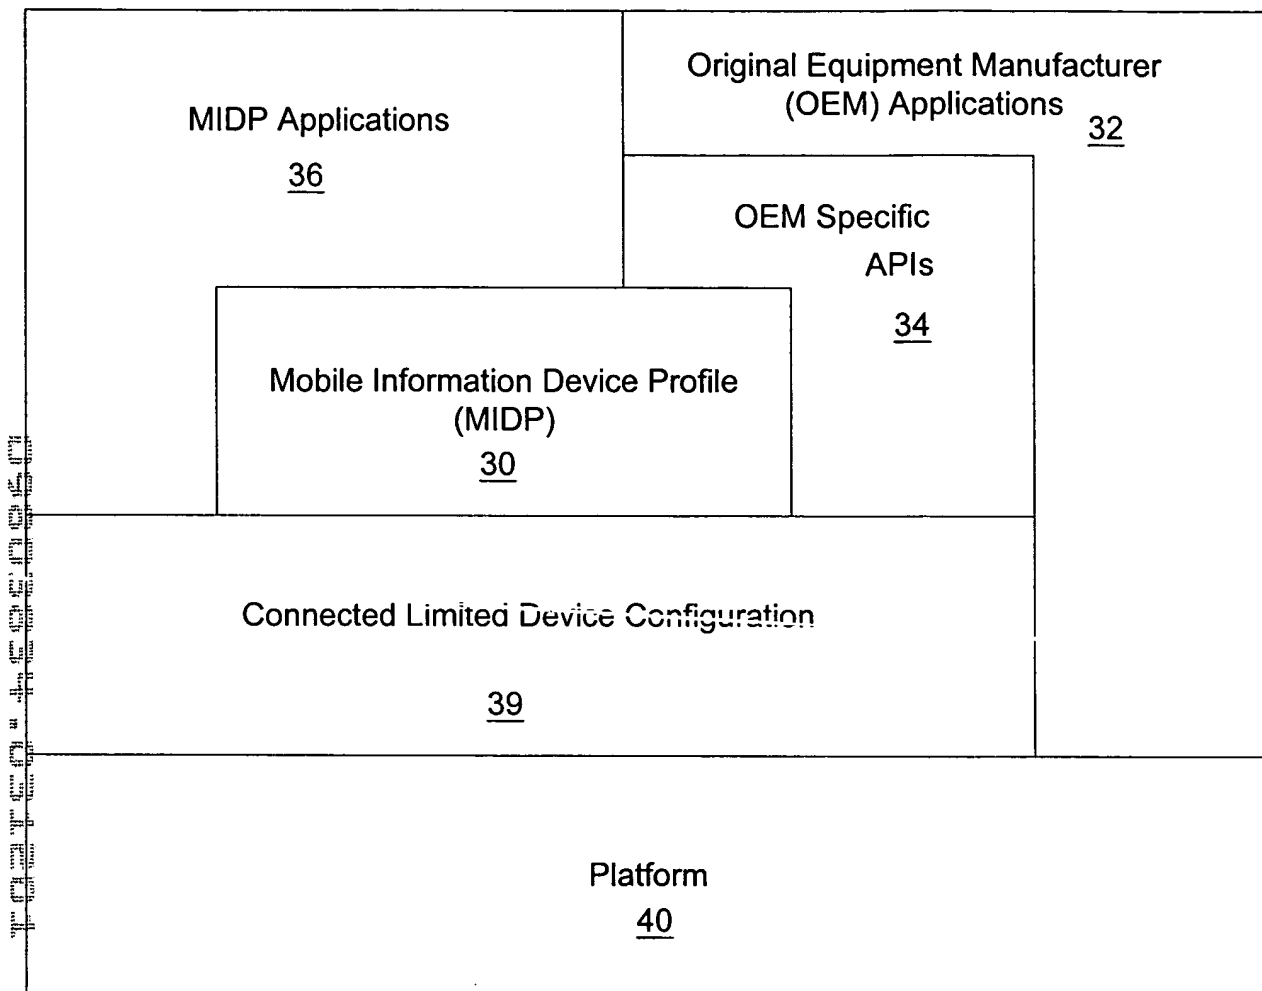

(PRIOR ART)
FIGURE 7

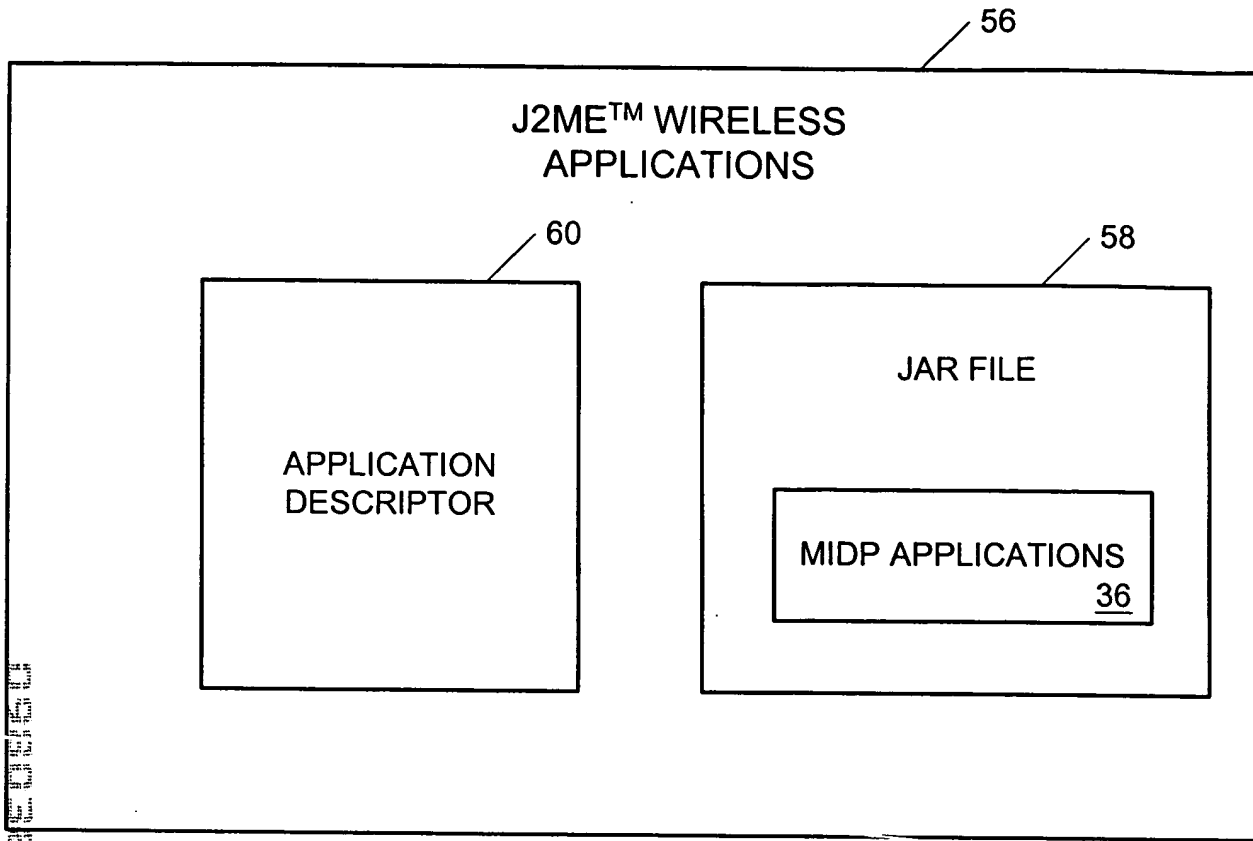

(PRIOR ART)
FIGURE 8

FIG. 9

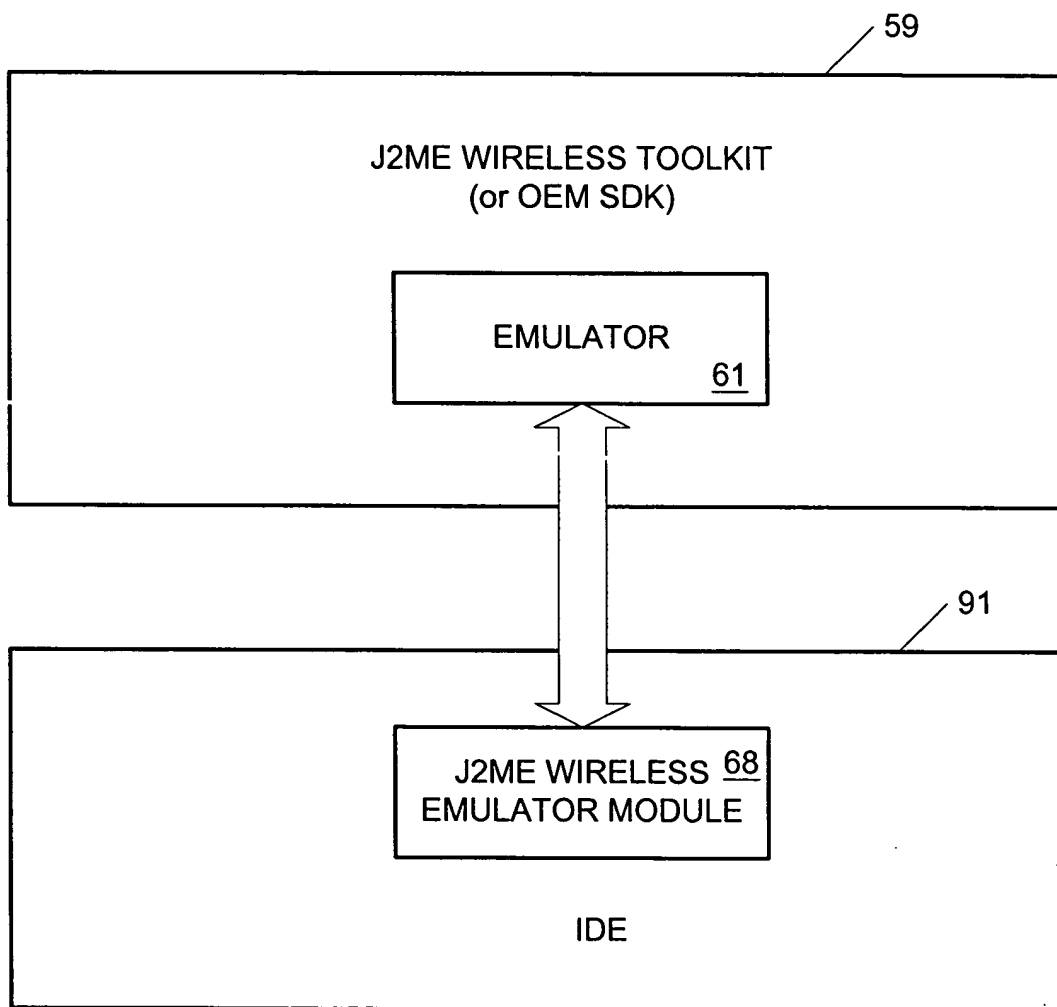


FIGURE 9

4426050

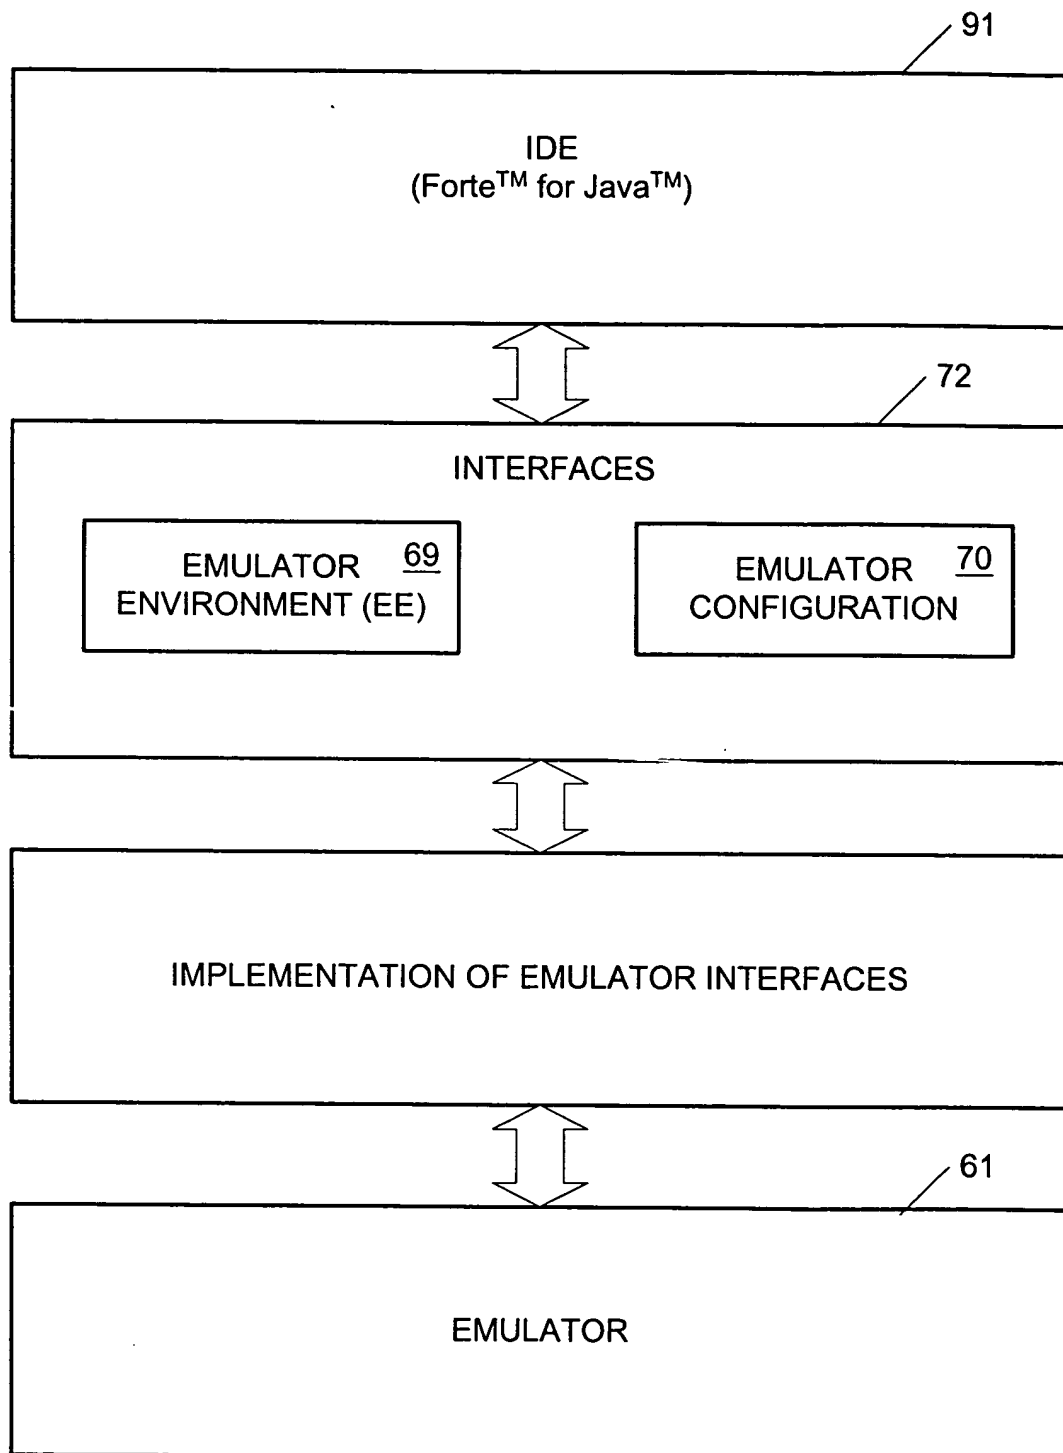


FIGURE 10

030334 0404

Customizer Dialog

95 DeviceName	DefaultColorPhone 97
96 HttpProxy	
TraceCalls	False
TraceClass	False
TraceExceptions	False
TraceGC	False
Verbose	False

Properties

Close

FIGURE 11

09003634 034201
T02T00" +E9C0260

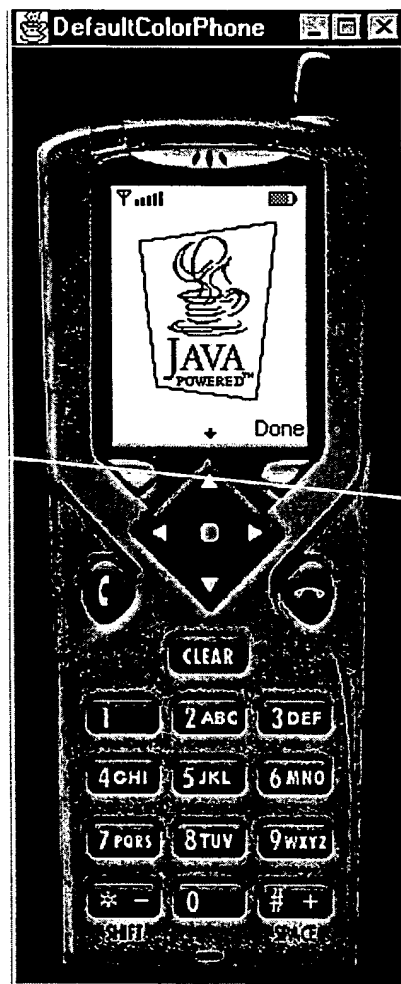


FIGURE 12

05803834 034204
T02F04E80850

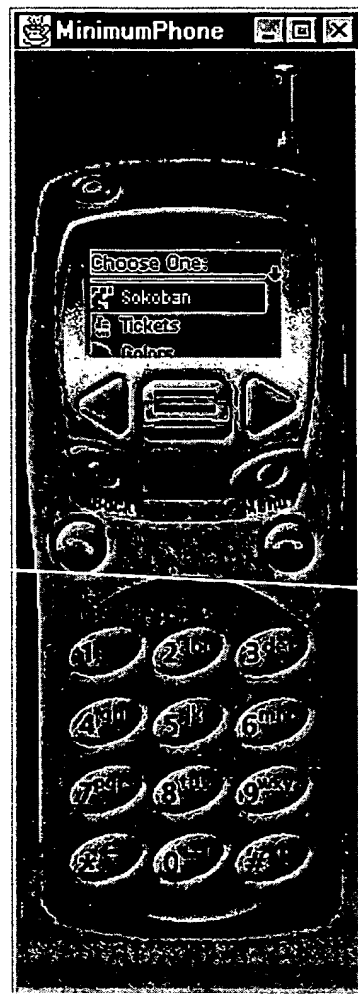


FIGURE 13

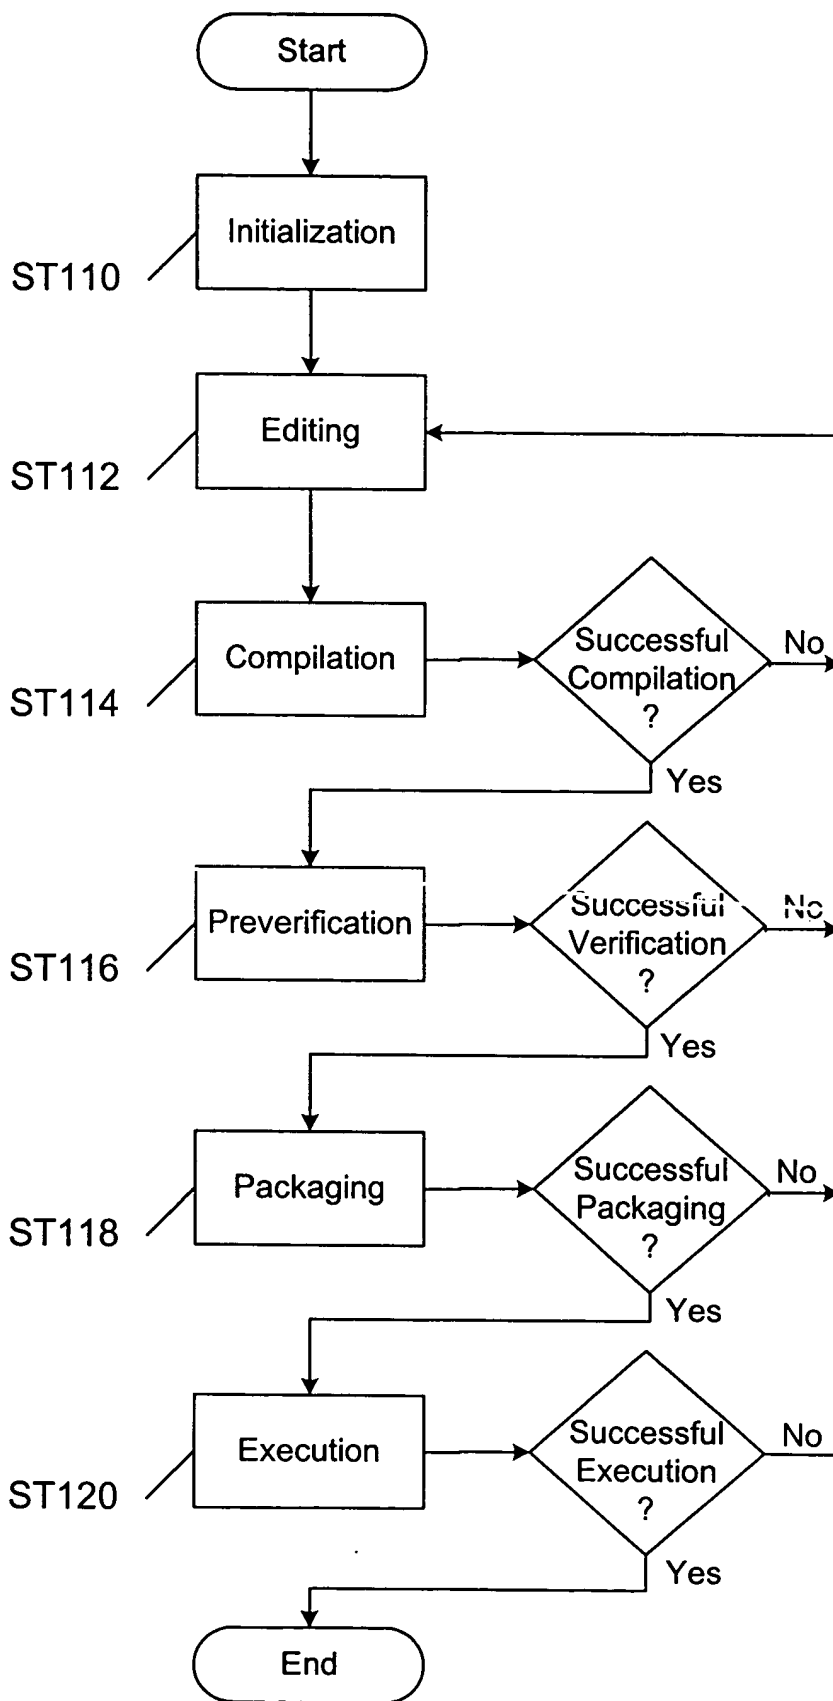


FIGURE 14

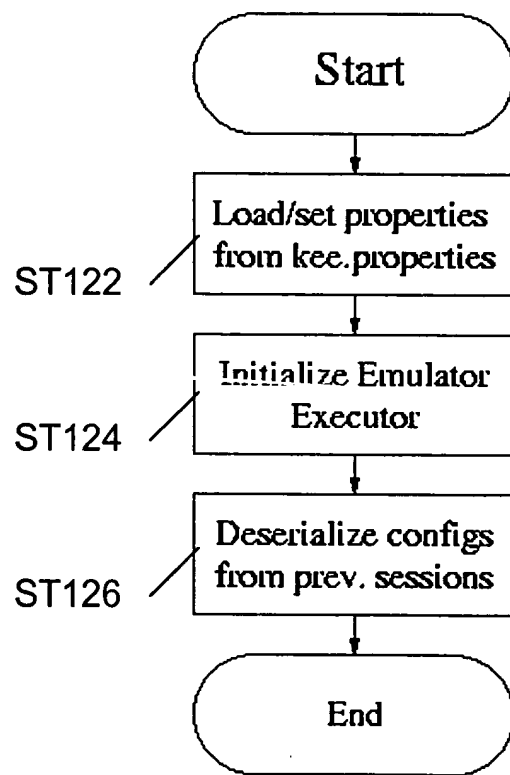


FIGURE 15

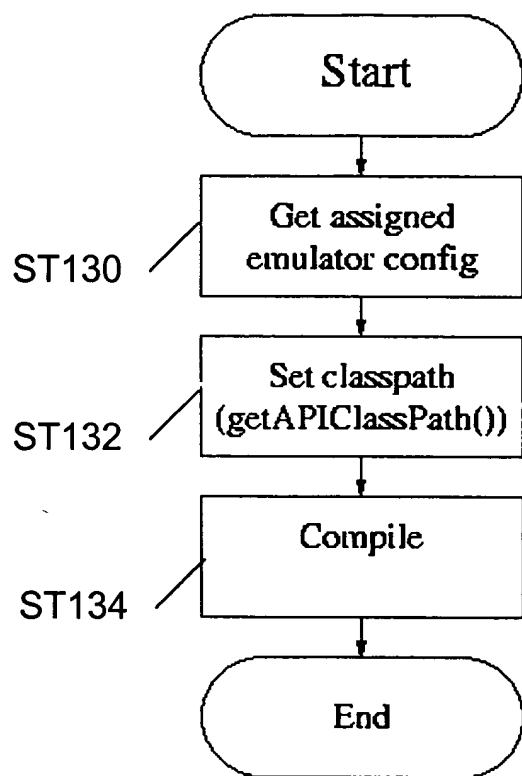


FIGURE 16

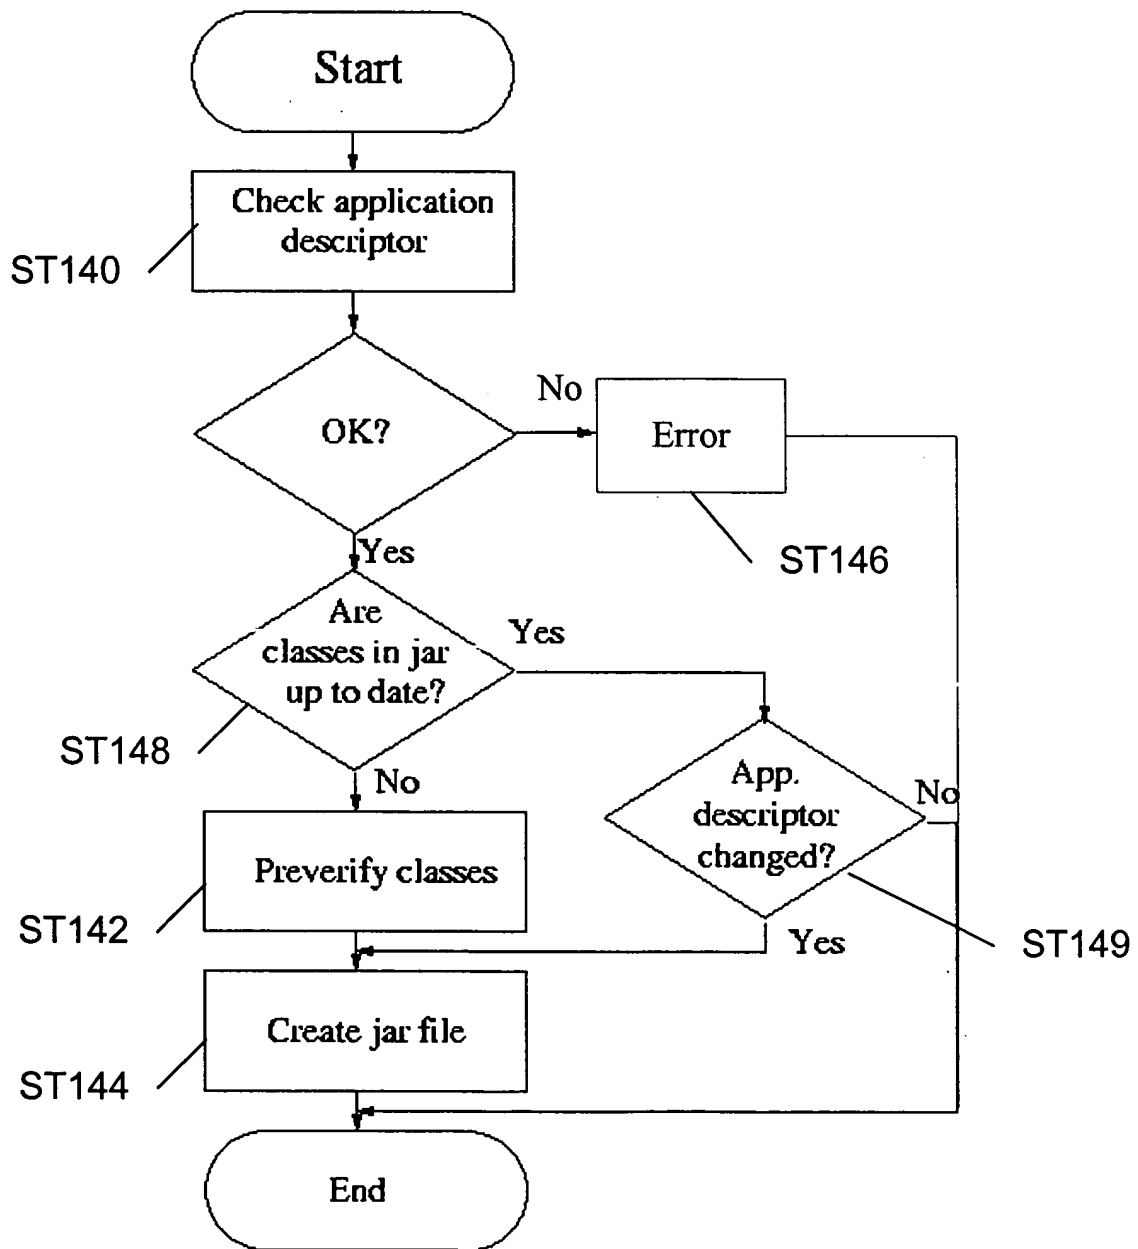


FIGURE 17

FIG. 18

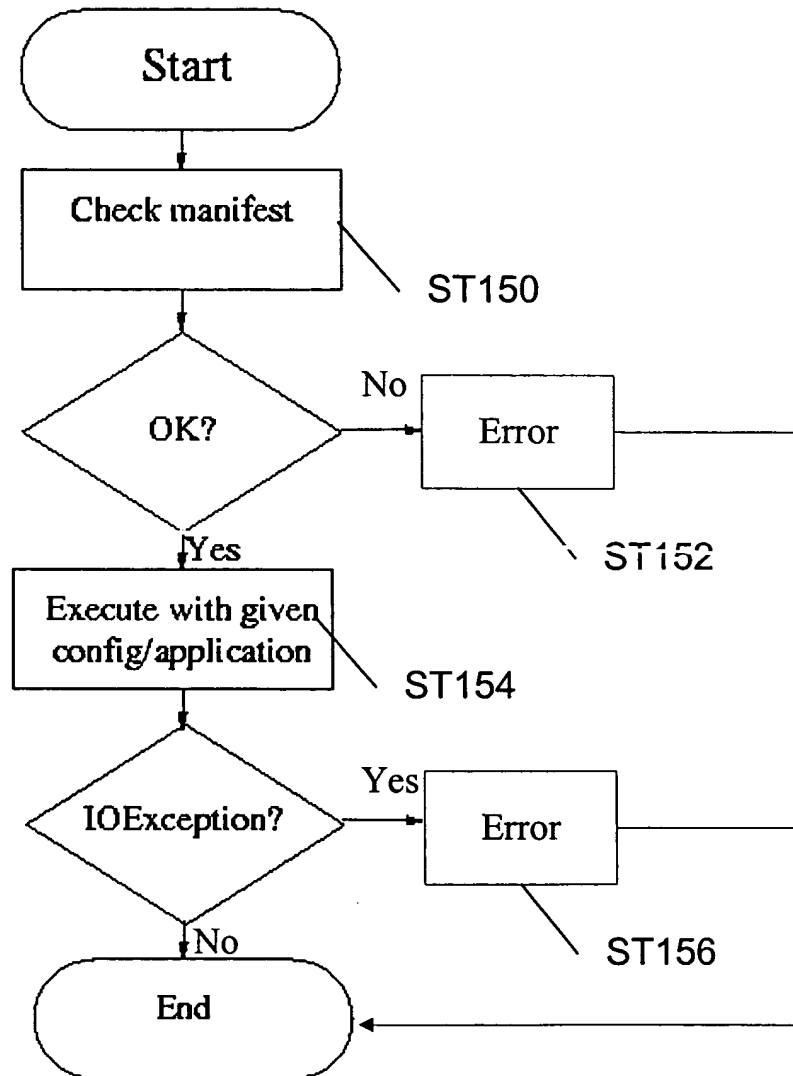


FIGURE 18

```
graph TD; Start([Start]) --> ST160[Install IDE]; ST160 --> ST162[Install J2ME Wireless Module]; ST162 --> ST163["Install the emulator configuration files (EmulatorEnv, EmulatorConfig)"]; ST163 --> ST164["Install OEM specific files (templates, parser database)"]; ST164 --> ST165[Start the IDE to finish installation]; ST165 --> End([End]);
```

The flowchart illustrates the installation process for the IDE. It begins with a 'Start' terminal, followed by a sequence of five process steps: 'Install IDE' (ST160), 'Install J2ME Wireless Module' (ST162), 'Install the emulator configuration files (EmulatorEnv, EmulatorConfig)' (ST163), 'Install OEM specific files (templates, parser database)' (ST164), and 'Start the IDE to finish installation' (ST165). The process concludes with an 'End' terminal.

FIGURE 19

FIG. 20

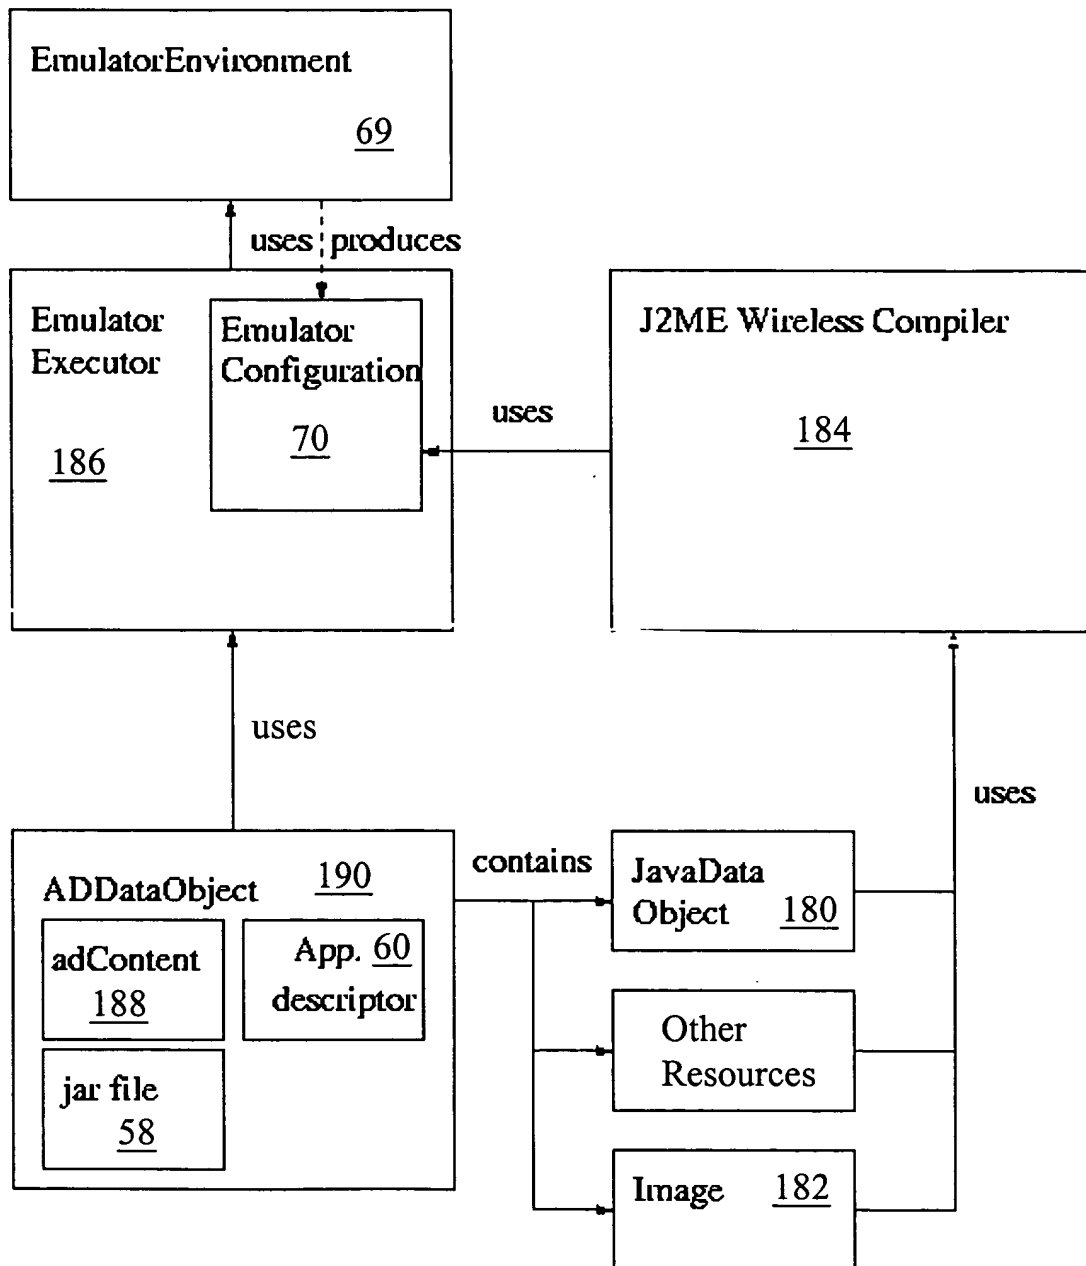


FIGURE 20